



CO-ORDINATION OF NOTIFIED BODIES
PPE-Directive 89/686/EEC + amendments

CNB/P/10.154
Revision 01
Language: E


RECOMMENDATION FOR USE

Number of pages: 1	Date: 9 th June 2011	Approval by :	Approved on :
Origin : RICOTEST		<input checked="" type="checkbox"/> Vertical Group	09/06/2011
		<input checked="" type="checkbox"/> Horizontal Committee	13/09/2011
		<input type="checkbox"/> Standing Committee	(date)

Question related to: EN ISO 17249	EN/prEN:	Other:
Annex: Article:	Clause:	

Key words:
Chainsaw cutting resistance , varying levels of localised protection

Question:
A boot with resistance to cutting with a chain saw has shown good performance for class 3, but the protective area is not uniform: it is all over formed by 2 layers of resistant fabric, but in the central part (above the foot ridge) there is a 3rd layer formed by a 65-95 mm wide strip of the resistant fabric.

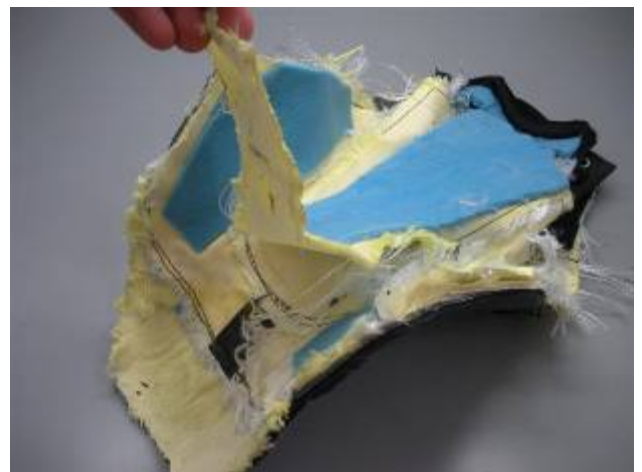

Solution:
With the footwear fully fastened, each protective area where a difference in composition is detected shall be tested for resistance to chainsaw cutting.

Sent to: members of the VG other(s) VG HC (2) TC (3) SC (4) other (5)
(5)

(1) Essential safety requirement
(2) HC = horizontal committee

(3) N° of CEN/TC (Secretary & Chairman)
(4) EEC Standing Committee 89/392

(5) To be specified