



CO-ORDINATION OF NOTIFIED BODIES
PPE-Directive 89/686/EEC + amendments

CNB/P/10.202
Revision 01
Language: E

RECOMMENDATION FOR USE



Number of pages: 1	Date: 18 May 2017	Approval by :	Approved on :
Origin : PFI		<input checked="" type="checkbox"/> Vertical Group	18/05/2017
		<input checked="" type="checkbox"/> Horizontal Committee	19/03/2018
		<input type="checkbox"/> Standing Committee	(date)

Question related to:	EN/prEN: EN ISO 20345:2011	Other:
Annex:	Article:	Clause: 6.2.1.2

Key words:
Perforation resistant insole/insock

Question:
Non-metallic perforation resistant inserts which also have the function as an insole are allowed to lie above the flange of the toecap.

The thickness of some perforation resistant materials is too much and the space under the toecap is not enough to pass the toecap testing. Is it possible to reduce the thickness of the perforation resistant material (only) in the area of the flange of the toecap to at least 2 mm.

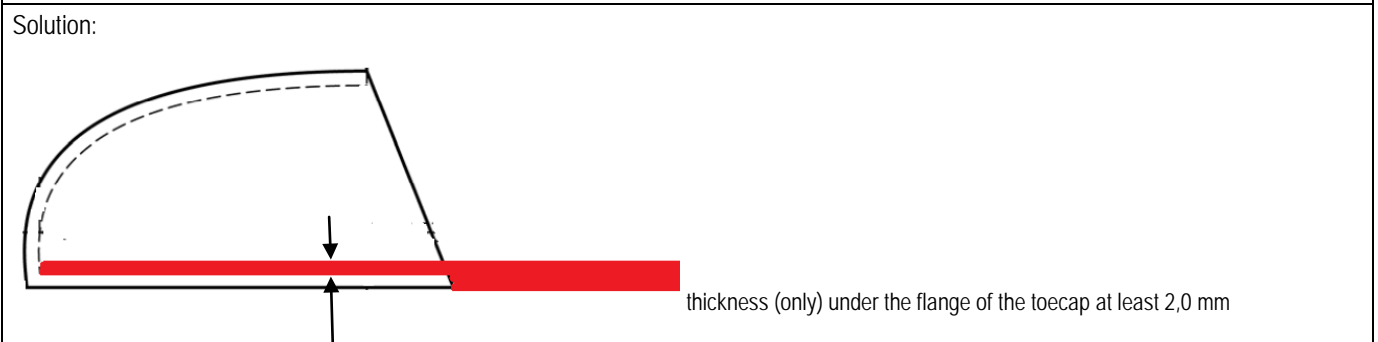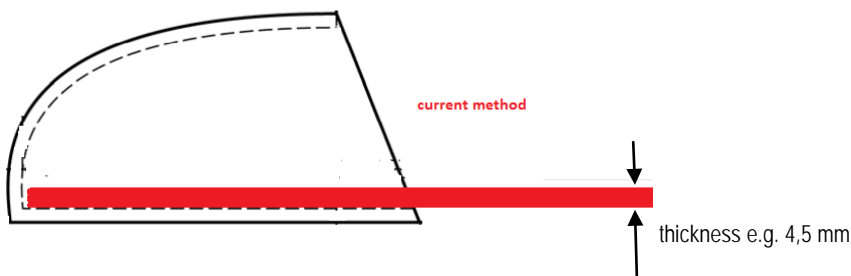

Yes, it is acceptable.

Sent to: members of the VG other(s) VG HC (2) TC (3) SC (4) other (5)

(5)

(1) Essential safety requirement
(2) HC = horizontal committee

(3) N° of CEN/TC (Secretary & Chairman)
(4) EEC Standing Committee 89/392

(5) To be specified